

CX410

2K 4MP PoE IP Camera with True Color Night Vision



ColorX True Color Night Vision

Turn the night into true colors with ColorX technology.



2K Super HD

Deliver sharp images day and night with rich details.



F1.0 Super Aperture

Captures four times more light than an F2.0 aperture.



3000K Adjustable Warm Light

Helps the camera capture more stunning full-color nighttime.



Smart Detection & Alerts

Distinguish people, vehicles, and pets and send accurate alerts.



IP66 Weatherproof

Performs excellently in any weather with its rugged housing.



Time Lapse

Get to know in seconds of what has happened over days.



Remote Access

Monitor your property via App/Client anytime, anywhere.




Smart Home Integration

View the live feeds hands-free using voice commands.




Colorize the Dark

Reveal the faintest details in the darkest night with the ColorX technology, even without any illumination.

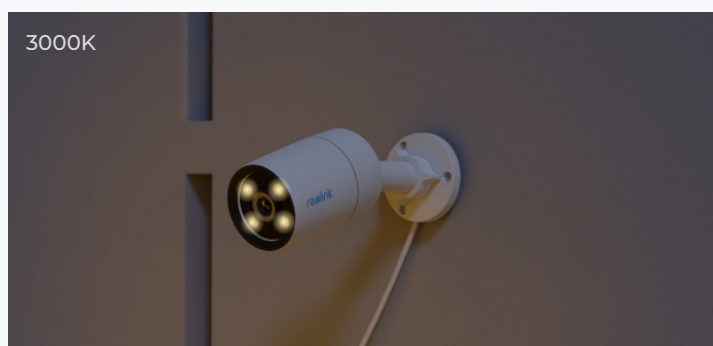


Neighbor-Friendly Warm Light

Increase its brightness gradually when turned on, helping to reduce potential light pollution and disturbance to your neighbors.

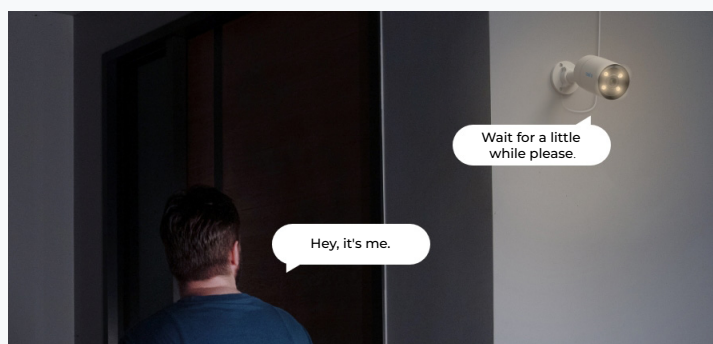

Talk Back in Real Time

Have a real-time conversation with anyone in front of the camera, such as greeting visitors and warning intruders, no matter where you are.

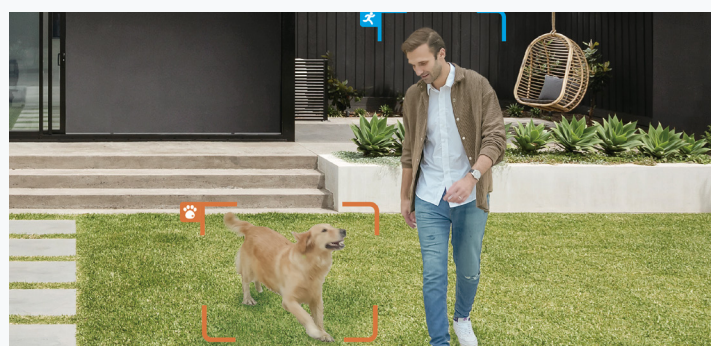

Focus on What Matters

Only get alerted to what you care, like people, vehicles, and pets. No more getting distracted by irrelevant movements.



Flexible & Secure Storage Options

Save your recordings locally to an optional microSD card or NVR, ensuring every piece of video is kept secure.

Model	CX410	
Video & Audio	Image Sensor	1/1.8" CMOS Sensor
	Video Resolution	Default: 2560*1440(4.0 megapixels)@30fps
	Lens	f=4mm F=1.0
	Video Format	H.264
	Field of View	Vertical: 46° Horizontal: 89°
	Color Night Vision	4pcs/3W/3000K/400Lumens
	Audio	Two-way audio
Power	PoE	IEEE 802.3af, 48V Activeusage & temperature.)
	DC Power	DC 12.0V=1A, <12W
Interface	Power	DC power port
	System	Reset button
	Ethernet	One 10M/100Mbps RJ45
	Storage	microSD card slot (Max. 256GB)
	Audio	Built-in microphone & speaker
Software Features	Frame Rate	Main stream: 2fps - 30fps (default: 25fps) Sub stream: 4fps - 15fps (default: 10fps)
	Code Rate	Main stream: 2048Kbps - 6144Kbps (default: 4096Kbps) Sub stream: 64Kbps - 512Kbps (default: 256Kbps)
	Browser Supported	Edge, Chrome, Firefox, Safari
	OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
	Smart Alarm	Motion detection/person detection/vehicle detection/pet detection
	Record Mode	Motion recording (default)/scheduled recording
	Protocols & Standards	HTTPS, SSL, TCP/IP, UDP, IPv4, UPnP, RTSP, RTMP, ONVIF, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
	Maximal User Access	20 Users (1 admin account & 19 user accounts); Support up to 12 simultaneous video streams (10 substreams & 2 mainstreams)
	Work with	Google Assistant
Working Environment	Operating Temperature	Operating temperature: -10°C~+50°C (14°F~122°F)
	Humidity	Operating humidity: 10% ~ 90%
	Weather Resistance	IP66
Size & Weight	Size	Φ67 x 187mm
	Weight	480g
Warranty	Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/



- | | | | | | |
|---|---------|---|-----------|---|------------------|
| 1 | Bracket | 2 | Speaker | 3 | Aluminum Housing |
| 4 | Lens | 5 | Spotlight | | |



- | | |
|---|-------------------|
| 1 | microSD Card Slot |
|---|-------------------|